

#### APPLICATION:

With ammeters, wattmeters and cross current compensation.

#### FREQUENCY:

50-400 Hz

### INSULATION LEVEL:

600 Volts. 10 kV BIL. full wave WINDOW DIAMETER:

#### 3.00"

#### APPROXIMATE WEIGHT: 1.5 lbs.

## CONNECTIONS:

-Flexible leads are UL 1015 105 C, CSA approved #16 AWG, 24" long

- -Non-standard length to be specified
- -Terminals are brass studs No. 8-32 UNC with
- one flat washer, lockwasher, and regular nut

-RBT and RT case styles also available and SFT

and SHT as SFL and SHL with leads

# **Current Transformer**



76SHT

Model

Width

Height

Depth

Window Size

	(HA)
Î	76RT
	d the

RT	C
P.	
$\mathbb{D}$	
A Sea	
	(

**76RT** 

3.00

4.50

4.64

1.10

76SFT

76RL

3.00

4.50

4.50

1.13

76SFT

3.00

4.54

4.68

1.12

c <b>FL</b> ® us	
E228202	
(SP-	

Model 76

**CERTIFICATIONS:** 

IS 223647



1-28

MODEL 76				
Window Diameter 3.00"				
Approximate weight: 1.5 lbs.				

**76SHT** 

3.00

4.54

4.68

1.12

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 HZ	BURDEN VA AT 60 HZ
76**-201	200:5	<u>+</u> 1%	5
76**-251	250:5	<u>+</u> 1%	5
76**-301	300:5	<u>+</u> 1%	6
76**-401	400:5	<u>+</u> 1%	10
76**-501	500:5	<u>+</u> 1%	10
76**-601	600:5	<u>+</u> 1%	10
76**-751	750:5	<u>+</u> 1%	10
76**-801	800:5	<u>+</u> 1%	12.5
76**-102	1000:5	<u>+</u> 1%	10
76**-122	1200:5	<u>+</u> 1%	10
76**-152	1500:5	<u>+</u> 1%	12.5
76**-162	1600:5	<u>+</u> 1%	12.5
76**-202	2000:5	<u>+</u> 1%	15

Note: When ordering, prefix Cat No. with model designation required, i.e. 76SFT-201, 76RL-201, etc.

76SHT 76SFT 76RL 76RT


Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA




## **Current Transformer**


Model 76




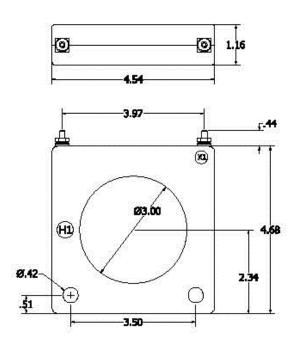

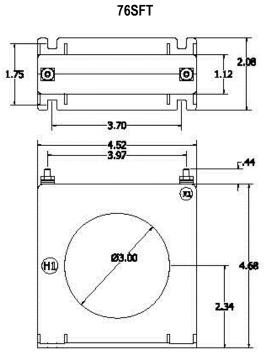












1-29

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA